


Product Data Sheet

GRM FRP Pipe Liners and Wear Pads

Benefits:

Suitable for a wide range of applications
 Fabricated to your project specifications
 Manufactured in the U.S.A.

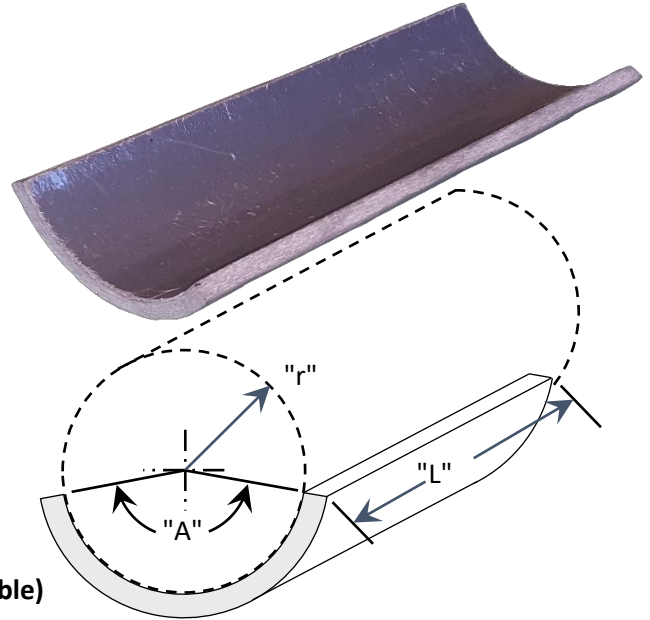

Design Data:

Operating Temperature -67° to +400° F
 Typically installed with epoxy adhesive
 Available in flat sheets, cut to size or as pipe liners per table below

Typical Pipe Liner Dimensions: (custom sizes are also available)

Pipe Size	Radius "r"	Angle "A"	Length "L"	Liner Thickness
1/2"	7/16"	90°	12"	1/4"
3/4"	9/16"	90°	12"	1/4"
1"	5/8"	90°	12"	1/4"
1-1/4"	7/8"	90°	12"	1/4"
1-1/2"	1"	90°	12"	1/4"
2"	1-3/16"	90°	12"	1/4"
2-1/2"	1-7/16"	90°	12"	1/4"
3"	1-13/16"	90°	12"	1/4"
3-1/2"	1-3/4"	90°	12"	1/4"
4"	2-1/4"	90°	12"	1/4"
5"	2-13/16"	90°	12"	1/4"
6"	3-5/16"	60°	12"	1/4"
8"	4-5/16"	60°	12"	1/4"
10"	5-3/8"	60°	12"	1/4"
12"	6-3/8"	30°	12"	1/4"
12"-20"	Pipe Size X .5	30°	12"	1/4"
24"-48"	Pipe Size X .5	30°	12"	3/8"

www.grmcp.com

(936) 441-5910

11133 I-45 S. Suite Q
 Conroe, TX 77302



Request a quote:

sales@grmcp.com

Design or specification help:

eng@grmcp.com