

Product Data Sheet

Fluorotemp Slide Plates

Benefits:


Insulated to allow highest design temperature
 Highest temperature and load range
 Custom-designed to your application's requirements
 Manufactured in America

Design Data:

Loading Range: 75 to 2,500psi
 Maximum Design Temperature up to 1,000°F
 Coefficient of friction: 0.10 to 0.04


Specifications:

Glass Filled PTFE mechanically attached to backer plate
 Designed to slide against a polished SS surface

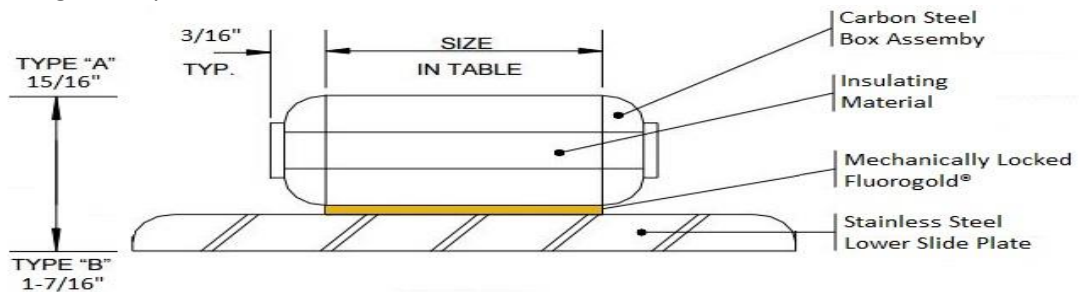

Type "A" for use up to 800°F, Type "B" for use up to 1000°F.

Upper Element Part No.	Size (W x L)	Maximum Load
FT-A-1 FT-B-1	4" x 4"	40,000 lb
FT-A-2 FT-B-2	4" x 6"	60,000 lb
FT-A-3 FT-B-3	4" x 8"	80,000 lb
FT-A-4 FT-B-4	6" x 6"	90,000 lb
FT-A-5 FT-B-5	6" x 8"	120,000 lb
FT-A-6 FT-B-6	8" x 8"	160,000 lb

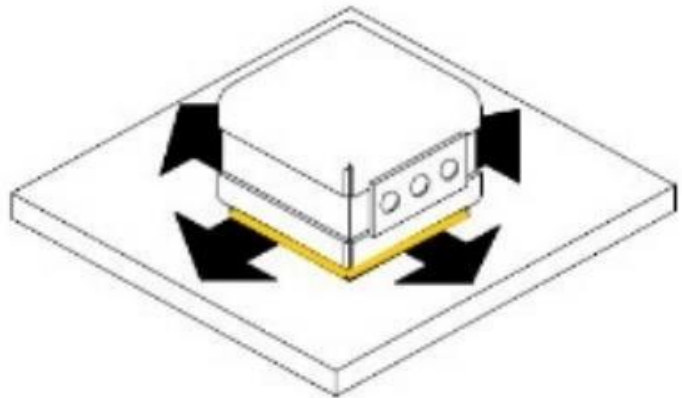

www.grmcp.com

(936) 441-5910

11133 I-45 S. Suite Q

Conroe, TX 77302

Fluorogold® is a registered trademark of St. Gobain



Request a quote:

sales@grmcp.com

Design or specification help:

eng@grmcp.com