

Product Data Sheet

GRM Cotton Duck

Benefits:

Meets AASHTO and MIL-C-882-E specifications
Allows for rotation at the bearing connection
Can be designed as plain or as part of a GRM Slide Assembly
Manufactured in America

Design Data:

Loading Range: up to 1500psi (per AASHTO)
Temperature Range: -45°F to +200°F
Ultimate Compressive Strength: 10,000psi


Specifications:

Multiple layers of cotton duck impregnated with a high-quality nitrile compound



Typical Properties:

GRM Cotton Duck Pads are technically engineered and specifically designed to cushion impact, shock, and vibration. Constructed of multiple layers of high-quality, cotton-polyester duck fabric, completely impregnated with specially designed nitrile compounds.

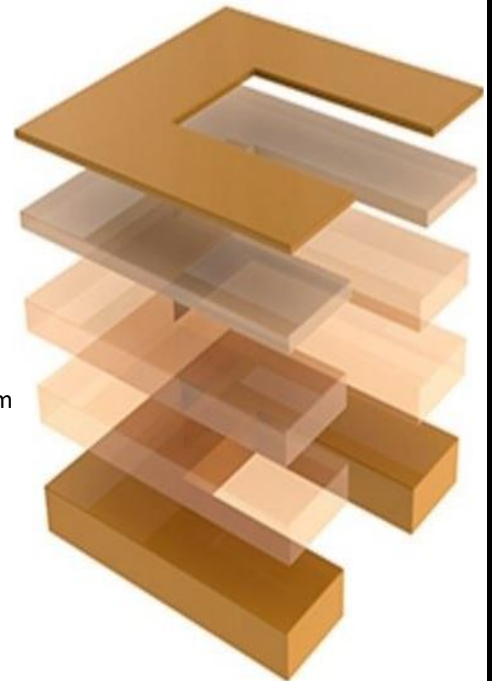

GRM Cotton Duck Pads are the answer to vibration, noise, impact and shock problem. They are manufactured to the rigid requirements of Military Specification MIL-C882-E, American Association of State Highway and Transportation Officials (AASHTO), and the Federal Bureau of Public Roads. Designed for use in bridge, industrial machinery and railroad applications. Test report and certifications will be furnished on request. Conforms to article 2.10.3 (1) AASHTO specifications.

www.grmcp.com

(936) 441-5910

11133 I-45 S. Suite Q
Conroe, TX 77302



Request a quote:

sales@grmcp.com

Design or specification help:

eng@grmcp.com