

FLUOROTEMP Slide Plates

BENEFITS

Insulated to allow highest design temperature

Highest temperature and load range

Custom-designed to your application's requirements

Manufactured in America.

SPECIFICATIONS

Glass Filled PTFE mechanically attached to backer plate
Designed to slide against a polished SS surface



DESIGN DATA

LOADING RANGE

The loading range is between 75 and 2,500 psi



TEMPERATURE RANGE

The temperature range is up to 1000°F

COEFFICIENT OF FRICTION

The coefficient of friction is 0.10 to 0.04

Upper Element Part No.	Size (W x L)	Maximum Load
FT-A-1 FT-B-1	4" x 4"	40,000 lb
FT-A-2 FT-B-2	4" x 6"	60,000 lb
FT-A-3 FT-B-3	4" x 8"	80,000 lb
FT-A-4 FT-B-4	6" x 6"	90,000 lb
FT-A-5 FT-B-5	6" x 8"	120,000 lb
FT-A-6 FT-B-6	8" x 8"	160,000 lb

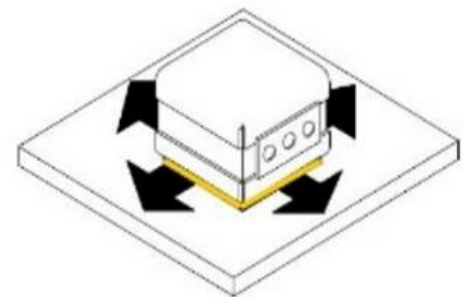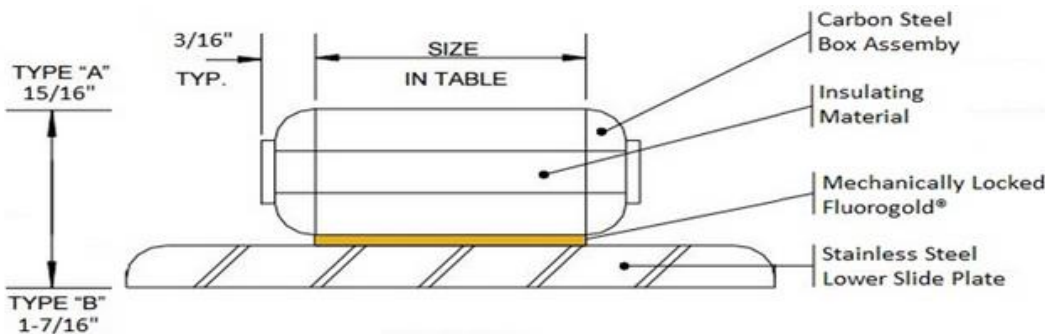

Request a quote: sales@grmcp.com

Website: www.grmcp.com

Design/specification help: eng@grmcp.com

Phone: (936) 441-5910

