

GRM G-10/FR-4

BENEFITS

Reduces heat transfer
between structural members


Limited creep under load

Flame Resistant

Washers and bushings
insulate bolts

SPECIFICATIONS

G-10/FR-4, is a laminate sheet comprised of a flame
retardant epoxy resin with a woven fiberglass substrate.
This grade qualifies to NEMA FR-4 and MIL-I-24768/27

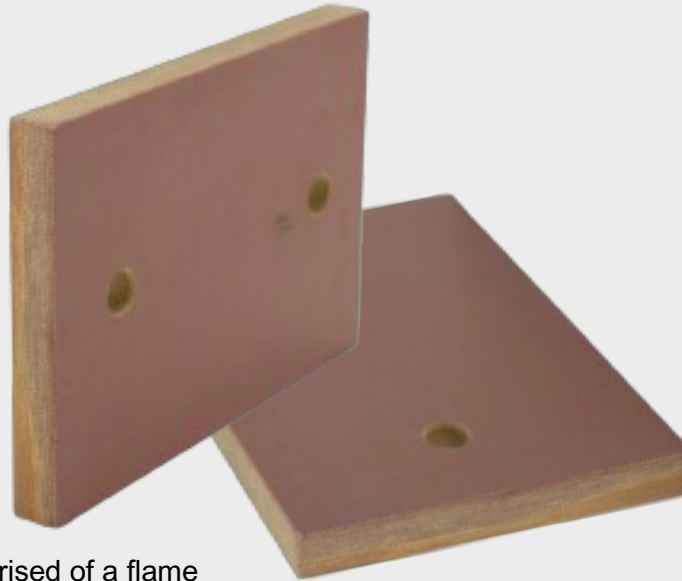

DESIGN DATA

Typical thicknesses:
1/2", 3/4", 1", 2"

Machined and
fabricated to your
design

Typical Properties

Typical Value

Units

Specific Gravity	1.85	
Water Absorption-.125"	< 0.1	%
Temperature Index	140 \ 284	°C \ °F
Rockwell Hardness	110	M scale
Bond Strength	> 2,200 \ 1,000	LBS \ kgs
Flexural Strength-LW-A-.125"	> 65,000 \ 448	PSI \ MPa
Flexural Strength-CW-A-.125"	> 50,000 \ 345	PSI \ MPa
Izod Impact Strength-LW	> 10	ft-lbs/in
Izod Impact Strength-CW	> 8	ft-lbs/in
Compressive Strength-Flatwise	> 60,000 \ 415	PSI \ MPa



Request a quote: sales@grmcp.com

Website: www.grmcp.com

Design/specification help: eng@grmcp.com

Phone: (936) 441-5910

