

GRM Thermal Break Pads G-10/FR-4


BENEFITS

Reduces heat transfer between structural members

Limited creep under load

Flame Resistant

Washers and bushings insulate bolts

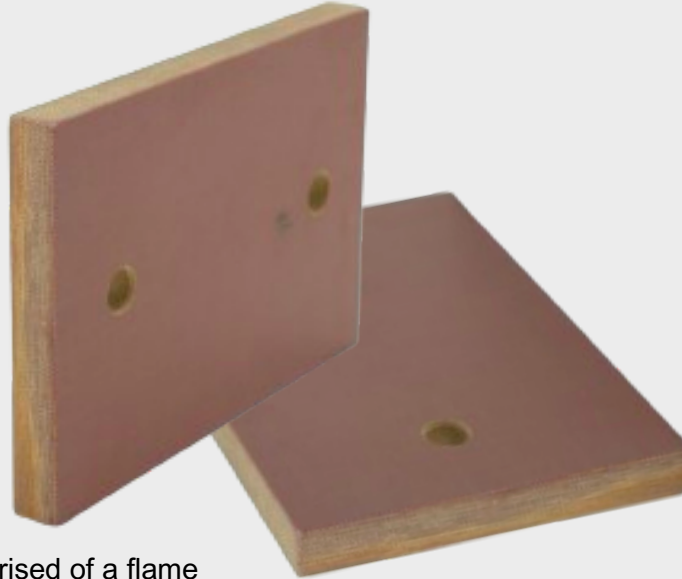

DESIGN DATA

Typical thicknesses:
1/2", 3/4", 1", 2"

Machined and fabricated to your design

SPECIFICATIONS

G-10/FR-4, is a laminate sheet comprised of a flame retardant epoxy resin with a woven fiberglass substrate. This grade qualifies to NEMA FR-4 and MIL-I-24768/27

<u>Typical Properties</u>	<u>Typical Value</u>	<u>Units</u>
Specific Gravity	1.85	
Water Absorption-.125"	< 0.1	%
Temperature Index	140 \ 284	°C \ °F
Rockwell Hardness	110	M scale
Bond Strength	> 2,200 \ 1,000	LBS \ kgs
Flexural Strength-LW-A-.125"	> 65,000 \ 448	PSI \ MPa
Flexural Strength-CW-A-.125"	> 50,000 \ 345	PSI \ MPa
Izod Impact Strength-LW	> 10	ft-lbs/in
Izod Impact Strength-CW	> 8	ft-lbs/in
Compressive Strength-Flatwise	> 60,000 \ 415	PSI \ MPa



Request a quote: sales@grmcp.com

Website: www.grmcp.com

Design/specification help: eng@grmcp.com

Phone: (936) 441-5910

